



# 1812 CLASSIC TELEPHONE INTERCOM SYSTEM

• **UNIQUE SYSTEM ALLOWS HOMEOWNERS TO USE THEIR TELEPHONE AS AN INTERCOM TO SPEAK WITH VISITORS AT THEIR FRONT DOOR OR GATE**



flush mount

wall mount

surface mount

- Unique communication and access control system allows homeowners to use their telephone as an intercom to speak to a guest at a front door or gate
- System connects directly to the homeowners existing telephone line. No additional monthly expenses for a separate telephone line
- Calls from access system are identified with a double ring. Homeowners know instantly if a call is coming from their door or gate
- Built-in call waiting assures that incoming or guest calls are not missed
- 2 year limited factory warranty



**grant guest access**  
by pressing 9 on the telephone



**full duplex**  
Hi quality communication – the same standard that the phone company uses




**modular design**  
makes installation and service easy



**talk**  
to front door or gate from any telephone in the home

# 1812 CLASSIC TELEPHONE INTERCOM SYSTEM

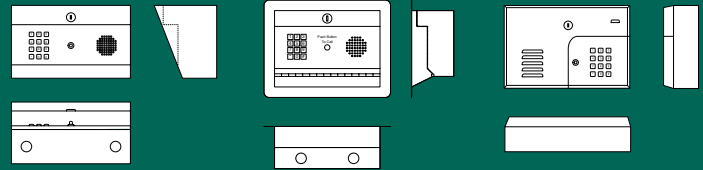

## 1812 Surface

10" W x 6.13" H x 5.25" D  
(254mm W x 156mm H x 133mm)

## 1812 Flush

11.88" W x 9.13" H x 4.5" D  
(302mm W x 232mm H x 114mm D)

## 1812 Wall

10.75" W x 7.38" H x 3.5" D  
(273mm W x 187mm H x 88.9mm D)

1812	PHONE # MEMORY	ENTRY CODES	DEVICE CODES	RELAYS	DIRECTORY	ELEVATOR CONTROL	PROGRAMMING OPTIONS	OPTIONS	TRANSACTION BUFFER
<b>Surface Mount</b>	3	50 (4-digit)	N/A	2	-	-	Keypad Touch-Tone Phone	Gold Plated Faceplate	-
<b>Flush Mount</b>	3	50 (4-digit)	N/A	2	-	-	Keypad Touch-Tone Phone	Gold Plated Faceplate	-
<b>Wall Mount</b>	3	50 (4-digit)	N/A	2	-	-	Keypad Touch-Tone Phone		-

## Technical Features

### Mechanical

- Stainless steel faceplate
- Galvanized steel sub-plate
- Metal keypad
- Offset speaker holes for protection
- Indoor or outdoor applications
- Enclosures are NEMA 4x rated
- Hands free

### Electrical

- 24 VAC (power transformer included)
- Full Duplex voice communication
- Unique ring
- Call waiting
- Call forwarding
- Three (3) preprogrammed call out phone numbers
- Special intercom mode for use with KSU and PBX phone systems
- Four-digit entry codes (50)
- Built-in time clock
- Entry code time zones
- Call forwarding time zone
- Hold open time zones (4)
- Do not disturb time zone
- Flash entry codes
- Two relays to control two entry points
- Multiple systems may share same phone line
- Secondary keypad can be added for entry code access at a second door or gate

### Miscellaneous

- Environmental: 10°F to 145°F (-12°C to 62°C)
- Camera Ready: Optional CCTV camera\*  
\*may require additional CCTV equipment
- Shipping weight approximately 15 Lbs (7 kg)



FCC (US) DUF6VT-12874-0T-0  
DOC (CAN) 1736 4507 A



Access Control Solutions since 1948

Distributed by:

### MEMBER:



### DOORKING®, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A.  
Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com  
© 2012 All Rights Reserved. Product specifications may change without notice.  
Rev. 9/12